



HYDROTAP G5 BC CLASSIC PLUS CHROME



BOILING



CHILLED

FILTERED

Order Code H55784Z00AU

Zip HydroTap Classic Plus Boiling, Chilled, Filtered water features simple, intuitive controls including continuous flow to fill bottles, Boiling water safety lock, and SteriTouch® antimicrobial protection impregnated within the new Classic Plus touch-pad for enhanced hygiene. The water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including 2 boiling water safety modes, 3 energy saving modes including ON/OFF timers and sensor activated 'sleep when it's dark', 'Quiet' mode with automated intelligent fan speed adjustment, SteriTouch® antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, and 0.2 micron water filtration.



Manufacturing Code H55784Z00AU

Capacity Residential

Tap Zip HydroTap CLASSIC PLUS Tap (Chrome)

Water Pressure Min 170kPa - Max 700kPa

Water Connection 1/2" BSP (G1/2)

Water Supply Requirements Cold

Water Valves Integrated 500kPa Pressure limiting valve and Dual Check Valve

Power Rating 1.44kW 220-240V 50Hz

Power Supply 1 x 10 Amp socket outlet

Dimensions W280mm x D455mm x H333mm

Product Approvals WaterMark, RCM, ARC

Warranty 5 years (appliance warranty 36 months plus additional 24 months tank warranty)


Installation Requirements

'1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com'

Installation Detail


Ventilation requirements Contact your local service provider if ventilation is not suitable


Clearance envelope
Position the Tap and the Command Centre as close together as possible.




200
333
50
Command Centre width 50


HydroTap Tap options

Classic Plus

116
116
126
126
116
116
116
116

Elite Plus

110
110
135
135
110
110
110
110


Font options

Raised Font with 135mm Extension

280
116
351
351
116
116
116
116

Font with 135mm Extension

280
116
351
351
116
116
116
116

Tap Positioning
Position the Tap to dispense into the sink, allowing clearance for a cup or teapot. Alternatively, mount the HydroTap Tap on a Font (available as an accessory).


35mm hole for HydroTap Tap



Sink


Cutting detail

108 hole for bowl
108 hole for bowl
35 hole for tap
35 hole for tap
108 hole for bowl
108 hole for bowl
35 hole for tap
35 hole for tap
108 hole for bowl
108 hole for bowl
35 hole for tap
35 hole for tap



108
108
35
35
108
108
35
35
108
108
35
35

4mm buffer pad air space



4mm buffer pad air space

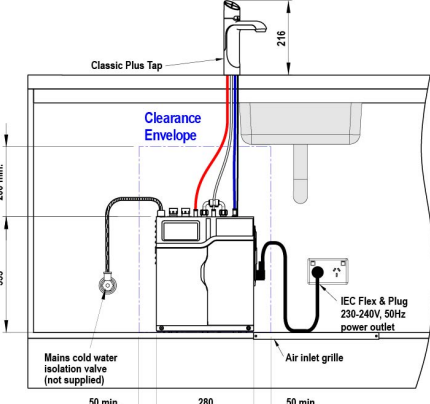
Classic Plus Tap
216
216

Clearance Envelope
200 min.
333
50 min.
280
50 min.

Clearance Envelope
455

IEC Flex & Plug 230-240V, 50Hz power outlet
Air inlet grille

Mains cold water isolation valve (not supplied)



216
216
200 min.
333
50 min.
280
50 min.
455
IEC Flex & Plug 230-240V, 50Hz power outlet
Air inlet grille
Mains cold water isolation valve (not supplied)

**HydroTap G5
BC Home, BC20**
shown with "Classic Plus" Tap

SCALE 1:5
ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.

