ZIP HYDROTAP BCS

Order Code HT1783

Zip HydroTap Residential, Boiling, Chilled, Sparkling, Filtered water appliance featuring a single under bench command centre including full colour interactive touch screen display with pin code protection, 2 boiling water safety modes, 3 energy saving modes including sensor activated "sleep when its dark", 0.2 micron water filtration and 2 disposable CO2 cylinders.

Manufacturing Code	1256AU0S0ZN1R
Capacity	Residential
Disability Options	Available

Tap	Zip HydroTap CLASSIC Tap (Chrome)
Water Pressure	Min 250kPa - Max 700kPa
Water Connection	12.7mm BSP
Water Supply Requirements	Cold
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Power Rating	1.7kW 220-240V 50/ 60 Hz
Power Supply	1 x 10Amp GPO
Dimensions	H333mm x W338mm x D461mm
Product Approvals	WaterMark, CE, RCM, ARC
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.
3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com

PDF DWG

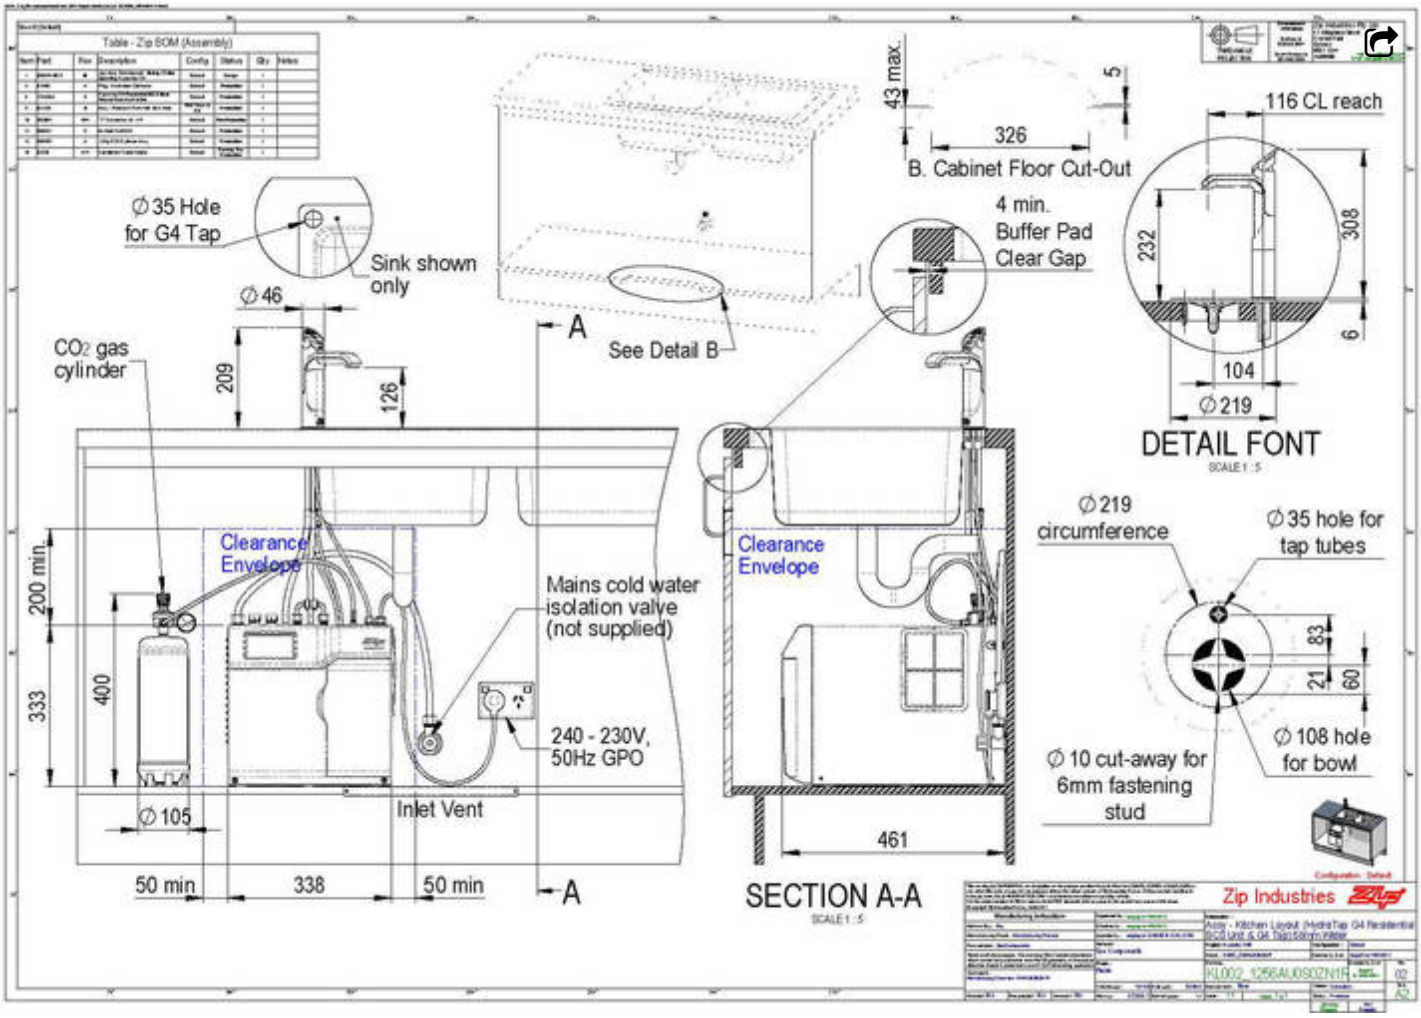
Table - Zip SOM (Assembly)
Ø35 Hole for G4 Tap
Sink shown only
Ø46
CO2 gas cylinder
209
126
A
See Detail B
43 max.
5
326
B. Cabinet Floor Cut-Out
4 min. Buffer Pad Clear Gap
116 CL reach
232
308
6
104
Ø219
DETAIL FONT
SCALE 1 : 5
Clearance Envelope
200 min.
333
400
Mains cold water isolation valve (not supplied)
240 - 230V, 50Hz GPO
Inlet Vent
Ø105
50 min
338
50 min
A
Clearance Envelope
461
SECTION A-A
SCALE 1 : 5
Ø219 circumference
Ø35 hole for tap tubes
83
21
60
Ø108 hole for bowl
Ø10 cut-away for 6mm fastening stud
Zip Industries