

M SERIES

Heavy-Duty Mains-Connected Drinking Fountains

The M Series is a sleek mains-connected water fountain with a heavy duty build. The tank is made from industrial grade stainless steel ensuring that the fountain will effortlessly meet demand.



KEY FEATURES

- 10 - 26L/h cold water output
- Industrial grade 304 stainless steel tank and robust construction
- Polished stainless steel top
- Front panel removes for ease of servicing
- Optional stainless steel cabinets
- Simple filter changes for filtered units
- Adjustable, tamper proof non-squirt bubbler and glass filler

The M Series is designed with an easily removable front panel that gives instant access to all components and controls. Hassle-free filter changes and services can be undertaken without disconnecting the plumbing.

With fingerprint-proof coating on both stainless steel and powder coated options, this robust water dispenser fits marvelously to a multitude of places including offices, worksites and gyms.

Filtered models feature a compact and easy to replace filter that removes taste, odour and chlorine. The filter is a proprietary carbon-block filter of greater density with a 2 micron filtration pad to prevent carbon and sediment bypass. A dual "O" ring, a bayonet lock system, ensures product performance.




Model Selection Chart

Cabinet	Filtered	10 Litres Per Hour		19 Litres Per Hour		26 Litres Per Hour	
		0 - 15 People (Office)*		15 - 40 People (Worksite)*		40 - 80 People (Gym)*	
		Bubbler	Bubbler & Glass Filler	Bubbler	Bubbler & Glass Filler	Bubbler	Bubbler & Glass Filler
Dark Grey Powder Coat	No	M2	M3	M4	M5	M10	M11
	Yes	M2F	M3F	M4F	M5F	M10F	M11F
Stainless Steel	No	N/A	N/A	M4SS	M5SS	M10SS	M11SS
	Yes	N/A	N/A	M4FSS	M5FSS	M10FSS	M11FSS

* Approximate figures only

TECHNICAL SPECIFICATIONS

Water Reservoir	5 L water tank is fabricated from industrial grade 304 stainless steel for longevity.	
Refrigeration	Uses R134A refrigerant which is non-toxic, non-flammable and environmentally sympathetic. The refrigerant flow is controlled by a capillary tube, which has no moving parts.	
	M2/M3	R134a - 125g
	M4/M5	R134a - 125g
	M10/M11	R134a - 125g
Water Flow Controls	The bubbler is rated to supply 1.7 L/m at mains water pressure of between 140 and 700 kPa.	
Water Connections	Water Inlet	½" Male B.S.P.
	Water Outlet	40mm Female P.V.C. Socket
Thermostat Control	The thermostat is factory set	
Compressors	M2/M3	PW4.5VK, ¼ HP, 128 W
	M4/M5	PW5.5VK, ¼ HP, 148 W
	M10/M11	PW6.5VK, ¼ HP, 168 W
Condenser	Copper tube and expanded aluminium fin	
Electrical	220-240 V, 50/60 Hz	
Weight (Packed)	M2/M3	26 kg
	M4/M5	26 kg
	M10/M11	26 kg
Dimensions (Packed)	500 x 500 x 1100 mm (W x D x H)	
Warranty	Twelve month comprehensive coverage, additional twenty-four month compressor replacement.	

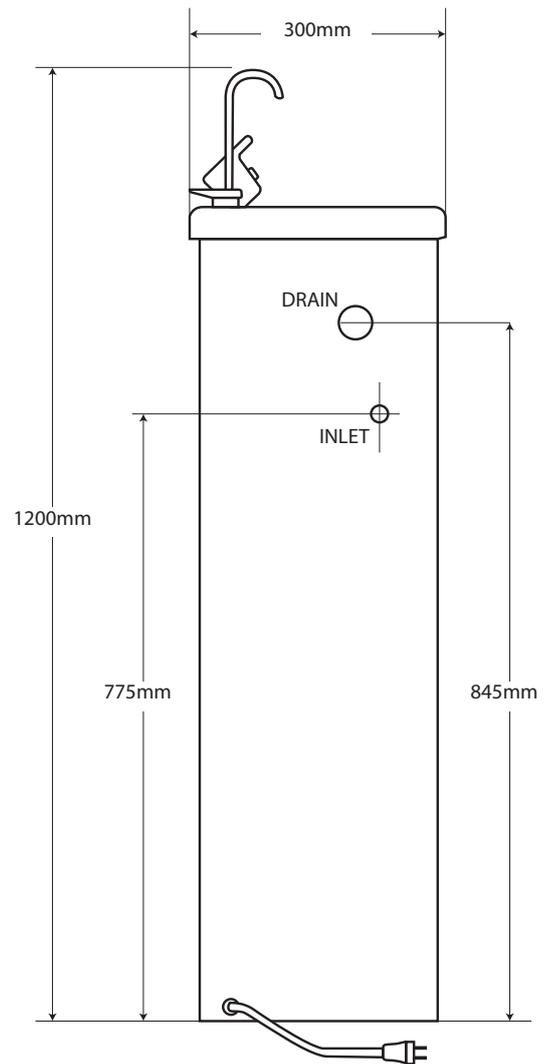

Spec No. WMTS 105:2016
SAI GLOBAL
WMK26317 (Lic. No.)