

Uniflow™ CRX-Series Rainwater Treatment Systems

The all new CRX-Series Rainwater Treatment and Pressure Pump Systems offer a complete treatment solution for commercial, urban and domestic applications. The standard CRX-45 and CRX-70 systems includes a pressure pump, dual cartridge filtration and UV disinfection, packaged inside a vandal resistant powdercoated lockable cabinet.

Both above ground and below ground tank applications are covered with a choice of horizontal or submersible stainless steel multistage pump options.

Now including Galaxy UV disinfection systems for reliable chemical-free disinfection of rainwater and alternate water supplies with extra long-life 12,000 Hour lamp life.



Customisable Feature Options

Customised treatment options are available to suit most applications



**Auto-Clean
Screen**




**Taste and Odour
Filter**




**Float-Free Rain/
Mains Valve**



**Low Tank Pump
Shutoff**

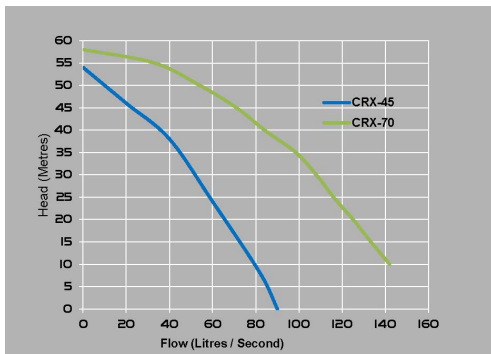

**Horizontal Pump
Performance Curve**

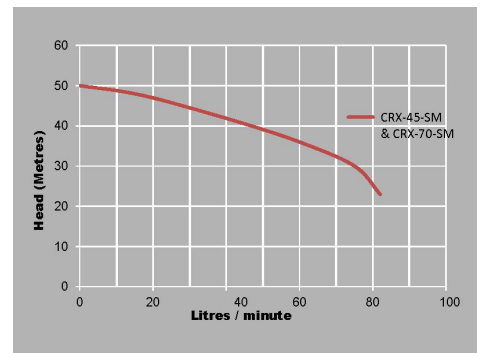

**Submersible Pump
Performance Curve**

Order Code	Taps	Pump Power		Flow		Connection		Ultraviolet System			Dimensions (W x H x D)
		V / kW	Current	Flow	Head	Inlet	Outlet	V / kW	Current	Lamp Power	
Above Ground Tank											
CRX-45	5 - 9	240V / 0.75kW	4.7A	45 LPM	35m	25 BSPF	20 BSPF	240V / 0.15kW	1.5A	34W	1.0 x 0.8 x 0.4
CRX-70	8 - 10	240V / 1.1kW	6.8A	70 LPM	45m	32BSPF	25 BSPF	240V / 0.15kW	1.5A	45W	1.0 x 1.0 x 0.4
Below Ground Tank (Submersible Pump)											
CRX-45-SM	6 - 9	240V / 0.8kW	4.6A	45 LPM	40m	25 BSPF	25 BSPF	240V / 0.15kW	1.5A	34W	1.0 x 0.8 x 0.4
CRX-70-SM	8 - 10	240V / 0.8kW	4.6A	70 LPM	30m	25 BSPF	25 BSPF	240V / 0.15kW	1.5A	45W	1.0 x 1.0 x 0.4